


60 系列 - 阴接头

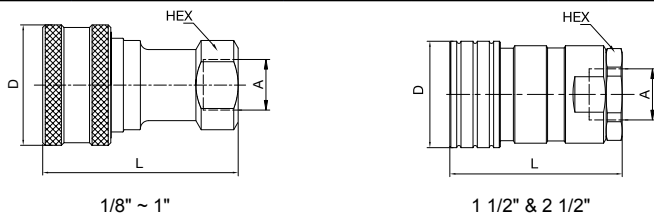

| 本体尺寸<br>inch | 型号<br>黄铜       | 工作压力**<br>bar | 型号<br>碳钢      | 工作压力**<br>bar | 螺纹 A              | 六角 HEX<br>inch | 总长 L<br>mm | 最大直径 D<br>mm |
|--------------|----------------|---------------|---------------|---------------|-------------------|----------------|------------|--------------|
| 1/8          | BH1-60         | 210           | H1-62         | 350           | 1/8-27 NPTF       | 11/16          | 49         | 25           |
| 1/8          | BH1-60-BSPP    | 210           | H1-62-BSPP    | 350           | G 1/8             | 11/16          | 49         | 25           |
| 1/4          | BH2-60         | 255           | H2-62         | 350           | 1/4-18 NPTF       | 13/16          | 58         | 29           |
| 1/4          | BH2-60-BSPP    | 255           | H2-62-BSPP    | 350           | G 1/4             | 13/16          | 61         | 29           |
| 3/8          | BH3-60         | 185           | H3-62         | 280           | 3/8-18 NPTF       | 7/8            | 63         | 36           |
| 3/8          | BH3-60-BSPP    | 185           | H3-62-BSPP    | 280           | G 3/8             | 1              | 70         | 36           |
| 1/2          | BH4-60         | 240           | H4-62         | 280           | 1/2-14 NPTF       | 1 1/8          | 73         | 45           |
| 1/2          | BH4-60-BSPP    | 240           | H4-62-BSPP    | 280           | G 1/2             | 1 1/8          | 78         | 45           |
| 3/4          | BH6-60         | 150           | H6-62         | 175           | 3/4-14 NPTF       | 1 5/16         | 91         | 55           |
| 3/4          | BH6-60-BSPP    | 150           | H6-62-BSPP    | 175           | G 3/4             | 1 5/16         | 93         | 55           |
| 1            | BH8-60         | 105           | H8-62         | 140           | 1-11 1/2 NPTF     | 1 5/8          | 106        | 64           |
| 1            | BH8-60-BSPP    | 105           | H8-62-BSPP    | 140           | G 1               | 1 5/8          | 106        | 64           |
| 1 1/2        | BH12-60L       | 105           | H12-62L       | 105           | 1 1/4-11 1/2 NPTF | 2 3/8          | 124        | 76           |
| 1 1/2        | BH12-60N       | 105           | H12-62N       | 105           | 1 1/2-11 1/2 NPTF | 2 3/8          | 124        | 76           |
| 1 1/2        | BH12-60L-BSPP  | 105           | H12-62L-BSPP  | 105           | G 1 1/4           | 2 3/8          | 124        | 76           |
| 1 1/2        | BH12-60N-BSPP  | 105           | H12-62N-BSPP  | 105           | G 1 1/2           | 2 3/8          | 128        | 76           |
| 2 1/2        | BH2016-60      | 85            | H2016-62      | 105           | 2-11 1/2 NPTF     | 3 3/4          | 142        | 104          |
| 2 1/2        | BH2020-60      | 85            | H2020-62      | 105           | 2 1/2-8 NPTF      | 3 3/4          | 154        | 104          |
| 2 1/2        | BH2016-60-BSPP | 85            | H2016-62-BSPP | 105           | G 2               | 3 3/4          | 145        | 104          |
| 2 1/2        | BH2024-60      | 85            | H2024-62      | 105           | 3-8 NPTF          | 4              | 170        | 111          |

| 本体尺寸<br>inch | 型号<br>303不锈钢  | 工作压力**<br>bar | 型号<br>316不锈钢  | 工作压力**<br>bar | 螺纹 A              | 六角 HEX<br>inch     | 总长 L<br>mm | 最大直径 D<br>mm |
|--------------|---------------|---------------|---------------|---------------|-------------------|--------------------|------------|--------------|
| 1/8          | SH1-62        | 350           | SSH1-62Y      | 350           | 1/8-27 NPTF       | 11/16              | 49         | 25           |
| 1/8          | SH1-62-BSPP   | 350           | SSH1-62Y-BSPP | 350           | G 1/8             | 11/16 <sup>1</sup> | 49         | 25           |
| 1/4          | SH2-62        | 350           | SSH2-62Y      | 350           | 1/4-18 NPTF       | 13/16              | 58         | 29           |
| 1/4          | SH2-62-BSPP   | 350           | SSH2-62Y-BSPP | 350           | G 1/4             | 13/16 <sup>2</sup> | 61         | 29           |
| 3/8          | SH3-62        | 350           | SSH3-62Y      | 350           | 3/8-18 NPTF       | 7/8                | 63         | 36           |
| 3/8          | SH3-62-BSPP   | 350           | SSH3-62Y-BSPP | 350           | G 3/8             | 1                  | 70         | 36           |
| 1/2          | SH4-62        | 350           | SSH4-62Y      | 350           | 1/2-14 NPTF       | 1 1/8              | 73         | 45           |
| 1/2          | SH4-62-BSPP   | 350           | SSH4-62Y-BSPP | 350           | G 1/2             | 1 1/8              | 78         | 45           |
| 3/4          | SH6-62        | 210           | SSH6-62Y      | 210           | 3/4-14 NPTF       | 1 5/16             | 91         | 55           |
| 3/4          | SH6-62-BSPP   | 210           | SSH6-62Y-BSPP | 210           | G 3/4             | 1 5/16             | 93         | 55           |
| 1            | SH8-62        | 210           | SSH8-62Y      | 210           | 1-11 1/2 NPTF     | 1 5/8              | 106        | 64           |
| 1            | SH8-62-BSPP   | 210           | SSH8-62Y-BSPP | 210           | G 1               | 1 5/8 <sup>3</sup> | 106        | 64           |
| 1 1/2        | SH12-62L      | 105           | SSH12-62LY    | 105           | 1 1/4-11 1/2 NPTF | 2 3/8 <sup>4</sup> | 124        | 76           |
| 1 1/2        | SH12-62N      | 105           | SSH12-62NY    | 105           | 1 1/2-11 1/2 NPTF | 2 3/8 <sup>4</sup> | 124        | 76           |
| 1 1/2        | SH12-62N-BSPP | 105           | --            | --            | G 1 1/2           | 2 1/2              | 128        | 76           |
| 2 1/2        | SH2016-62     | 105           | SSH2016-62Y   | 105           | 2-11 1/2 NPTF     | 3 3/4              | 142        | 104          |
| 2 1/2        | SH2020-62     | 105           | SSH2020-62Y   | 105           | 2 1/2-8 NPTF      | 3 3/4              | 154        | 104          |
| 2 1/2        | SH2024-62     | 105           | SSH2024-62Y   | 105           | 3-8 NPTF          | 4                  | 170        | 111          |

\*\* 该工作压力为低循环、无脉冲应用状态下的额定压力。

1. 316 不锈钢六角对为 14mm.    2. 303 不锈钢六角对为 19mm.    3. 316 不锈钢六角对为 41mm.    4. 303 不锈钢六角对为 2 1/2".

样本尺寸仅供参考，请以实际产品尺寸为准。



A 软管, 接头及设备

B 硬管接头及设备

C 快换接头

D 其他产品

60 系列 - 阳接头



| 本体尺寸<br>inch | 型号<br>黄铜       | 工作压力**<br>bar | 型号<br>碳钢      | 工作压力**<br>bar | 螺纹 A              | 六角<br>HEX<br>inch | 总长<br>L<br>mm | 连接后外<br>露长度*<br>mm | 最大直<br>径 D<br>mm |
|--------------|----------------|---------------|---------------|---------------|-------------------|-------------------|---------------|--------------------|------------------|
| 1/8          | BH1-61         | 210           | H1-63         | 350           | 1/8-27 NPTF       | 9/16              | 32            | 11                 | 17               |
| 1/8          | BH1-61-BSPP    | 210           | H1-63-BSPP    | 350           | G 1/8             | 9/16              | 32            | 11                 | 17               |
| 1/4          | BH2-61         | 255           | H2-63         | 350           | 1/4-18 NPTF       | 3/4               | 39            | 14                 | 22               |
| 1/4          | BH2-61-BSPP    | 255           | H2-63-BSPP    | 350           | G 1/4             | 3/4               | 43            | 17                 | 22               |
| 3/8          | BH3-61         | 185           | H3-63         | 280           | 3/8-18 NPTF       | 7/8               | 43            | 14                 | 26               |
| 3/8          | BH3-61-BSPP    | 185           | H3-63-BSPP    | 280           | G 3/8             | 7/8               | 50            | 20                 | 26               |
| 1/2          | BH4-61         | 240           | H4-63         | 280           | 1/2-14 NPTF       | 1 1/8             | 50            | 18                 | 33               |
| 1/2          | BH4-61-BSPP    | 240           | H4-63-BSPP    | 280           | G 1/2             | 1 1/8             | 54            | 21                 | 33               |
| 3/4          | BH6-61         | 150           | H6-63         | 175           | 3/4-14 NPTF       | 1 3/8             | 62            | 20                 | 41               |
| 3/4          | BH6-61-BSPP    | 150           | H6-63-BSPP    | 175           | G 3/4             | 1 3/8             | 65            | 22                 | 41               |
| 1            | BH8-61         | 105           | H8-63         | 140           | 1-11 1/2 NPTF     | 1 5/8             | 74            | 25                 | 48               |
| 1            | BH8-61-BSPP    | 105           | H8-63-BSPP    | 140           | G 1               | 1 5/8             | 74            | 25                 | 48               |
| 1 1/2        | BH12-61L       | 105           | H12-63L       | 105           | 1 1/4-11 1/2 NPTF | 2 3/8             | 121           | 68                 | 70 <sup>1</sup>  |
| 1 1/2        | BH12-61N       | 105           | H12-63N       | 105           | 1 1/2-11 1/2 NPTF | 2 3/8             | 121           | 68                 | 70 <sup>1</sup>  |
| 1 1/2        | BH12-61L-BSPP  | 105           | H12-63L-BSPP  | 105           | G 1 1/4           | 2 3/8             | 121           | 68                 | 70               |
| 1 1/2        | BH12-61N-BSPP  | 105           | H12-63N-BSPP  | 105           | G 1 1/2           | 2 3/8             | 125           | 68                 | 70               |
| 2 1/2        | BH2016-61      | 85            | H2016-63      | 105           | 2-11 1/2 NPTF     | 3 3/4             | 140           | 74                 | 104              |
| 2 1/2        | BH2020-61      | 85            | H2020-63      | 105           | 2 1/2-8 NPTF      | 3 3/4             | 151           | 85                 | 104              |
| 2 1/2        | BH2016-61-BSPP | 85            | H2016-63-BSPP | 105           | G 2               | 3 3/4             | 143           | 70                 | 104              |
| 2 1/2        | BH2024-61      | 85            | H2024-63      | 105           | 3-8 NPTF          | 4                 | 175           | 109                | 111              |

| 本体尺寸<br>inch | 型号<br>303不锈钢  | 工作压力**<br>bar | 型号<br>316不锈钢  | 工作压力**<br>bar | 螺纹 A              | 六角<br>HEX<br>inch  | 总长<br>L<br>mm | 连接后外<br>露长度*<br>mm | 最大直<br>径 D<br>mm |
|--------------|---------------|---------------|---------------|---------------|-------------------|--------------------|---------------|--------------------|------------------|
| 1/8          | SH1-63        | 350           | SSH1-63Y      | 350           | 1/8-27 NPTF       | 9/16               | 32            | 11                 | 17               |
| 1/8          | SH1-63-BSPP   | 350           | SSH1-63Y-BSPP | 350           | G 1/8             | 9/16 <sup>2</sup>  | 32            | 11                 | 17 <sup>3</sup>  |
| 1/4          | SH2-63        | 350           | SSH2-63Y      | 350           | 1/4-18 NPTF       | 3/4                | 39            | 14                 | 22               |
| 1/4          | SH2-63-BSPP   | 350           | SSH2-63Y-BSPP | 350           | G 1/4             | 3/4 <sup>4</sup>   | 43            | 17                 | 22               |
| 3/8          | SH3-63        | 350           | SSH3-63Y      | 350           | 3/8-18 NPTF       | 7/8                | 43            | 14                 | 26               |
| 3/8          | SH3-63-BSPP   | 350           | SSH3-63Y-BSPP | 350           | G 3/8             | 7/8                | 50            | 20                 | 26               |
| 1/2          | SH4-63        | 350           | SSH4-63Y      | 350           | 1/2-14 NPTF       | 1 1/8              | 50            | 18                 | 33               |
| 1/2          | SH4-63-BSPP   | 350           | SSH4-63Y-BSPP | 350           | G 1/2             | 1 1/8              | 54            | 21                 | 33               |
| 3/4          | SH6-63        | 210           | SSH6-63Y      | 210           | 3/4-14 NPTF       | 1 3/8              | 62            | 20                 | 41               |
| 3/4          | SH6-63-BSPP   | 210           | SSH6-63Y-BSPP | 210           | G 3/4             | 1 3/8              | 65            | 22                 | 41               |
| 1            | SH8-63        | 210           | SSH8-63Y      | 210           | 1-11 1/2 NPTF     | 1 5/8              | 74            | 25                 | 48               |
| 1            | SH8-63-BSPP   | 210           | SSH8-63Y-BSPP | 210           | G 1               | 1 5/8              | 74            | 25                 | 48               |
| 1 1/2        | SH12-63L      | 105           | SSH12-63LY    | 105           | 1 1/4-11 1/2 NPTF | 2 3/8 <sup>5</sup> | 121           | 68                 | 70               |
| 1 1/2        | SH12-63N      | 105           | SSH12-63NY    | 105           | 1 1/2-11 1/2 NPTF | 2 3/8 <sup>5</sup> | 121           | 68                 | 70               |
| 1 1/2        | SH12-63N-BSPP | 105           | --            | --            | G 1 1/2           | 2 1/2              | 125           | 68                 | 70               |
| 2 1/2        | SH2016-63     | 105           | SSH2016-63Y   | 105           | 2-11 1/2 NPTF     | 3 3/4              | 140           | 74                 | 104              |
| 2 1/2        | SH2020-63     | 105           | SSH2020-63Y   | 105           | 2 1/2-8 NPTF      | 3 3/4              | 151           | 85                 | 104              |
| 2 1/2        | SH2024-63     | 105           | SSH2024-63Y   | 105           | 3-8 NPTF          | 4                  | 175           | 109                | 111              |

\* 该尺寸为阳接头与对应的阴接头连接后无法插入部分的长度。

\*\* 该工作压力为低循环、无脉冲应用状态下的额定压力。

1. 黄铜的最大直径为 76mm。  
5.303 不锈钢六角尺寸为 2 1/2"。

2. 316 不锈钢六角尺寸为 17mm。

3. 316 不锈钢最大直径为 20mm。

4. 303 不锈钢六角尺寸为 19mm。

样本尺寸仅供参考, 请以实际产品尺寸为准。